

**NEWTOP**

**CRAFTOP**®

**GARDEN MACHINERY CATALOGUE**



**Shanghai Newtop Machinery Co.,Ltd.**

Add:1st Floor,Building 6 Xinqiao Creative Park No 183 Yinshan Rd Pudong Shanghai China

Tel:+86-21-51692011 Fax:+86-21-51692022

Web:www.newtopen.com E-mail:online@newtop.com.cn

# Provide Professional and Integrated Solution to Garden Machinery



At NEWTOP, we spent twelve years in constantly looking for ways to deliver reliable and powerful gasoline machines. Our only aim is to make gardening work easier and more enjoyable.

With years' development, our company has reached an annual capacity of 500,000 units of machines including brush cutters and chain saws. Up to now, we have established the CNC AL-MG processing center, the Injection Mould Center and the Testing Center which is equipped with emission testing equipments, gas composition analyzer, magneto testing desk, metal composition analyzer, hardness tester etc.

The adoption of these advanced facilities



from America, Germany and Japan enables us to supply top quality machines to customers all over the world with high efficiency. Our complete testing equipments, strict QA procedures and professional engineers ensure the reliability and safety of our machines. Our equipments and technology control standards have reached the internationally advanced level. Our products have passed CE, GS, EUROII, EPA certification, and our company is also certified with ISO9001-2000 standards.

All the staff in the company are doing their job with our faith "Customers and End Users are the Center", including our experienced service team. With twelve years' experience in exporting, they are responsive to our customers' request and efficient in solving

possible problems during the whole process of delivery. Our excellent pre- and after-sales service ensures the fast and safe delivery of your goods.

We are pleased to show you our latest generation of products with this catalogue. The thing that every product in common is to make your work easier, Just be happy with us and enjoy browsing through our new catalogue.

## Enterprise Milestones Enterprise Cultural Value

01-02  
03-04

## Chainsaw

NT9210 05-06  
NT9200 07-08  
NT7010 09  
NT6800 10  
NT6200 11  
NT6210-ES 11-12  
NT5800 13-14  
NT5800-ES 13-14  
NT5200 15  
NT5200-ES 16  
NT4500 17  
NT4500-ES 18  
NT4200 19  
NT3700 20  
NT3500 21  
NT3200 22  
NT2500 23  
NT10500 23-24

## Brush Cutter D Series

NTD430 27-28  
NTD520 27-28

## C Series

NTC420 29-30  
NTC520 29-30  
NTC430QL 31

## B Series

NTB330B 31  
NTB430B 31  
NTB520B 31  
NTB520QL 32

# Contents

## A Series

NTCG260 33-34  
NTCG330 35  
NTCG430 35  
NTCG520 35

## Backpack

NTC420BG 36  
NTC520BG 36

## Four-stroke

NTS139CG 37  
NTS140CG 38

## Pole Saw

NTPS260 39

## Sprayer

NTS423 40  
NTS420 41  
NTS428 42

## Earth Auger

NTA330A-08A 43  
NTA430B-10B 43  
NTA430C-10C 44  
NTA430D-10C 44  
NTA520D-12D 45

## Tea Picking Machine

NTH260 45

## MULTI-FUNCTION TOOLS

46

## ACCESSORIES

47-50

**1998**

Exported to African markets such as Nigeria, Cameroon

**2003**

Further expanded African markets in Ghana, South Africa and developed the Indonesian market

**2004**

Successfully developed Belarus, Russian markets in Eastern Europe and Thailand, Cambodia, Vietnam markets in Southeast Asia

**2005**

Entered other Southeast Asia markets like Malaysia, Singapore, and exported to Mexico and other markets in North America and South America

**2006**

Started supplying to India, Brazil, Paraguay markets

**2007**

Entered Colombia, Peru, Chile markets and successfully developed Iran, Dubai, South Korea, and Greek markets.

**2008**

Fully expanded the Russian market and opened up markets in the United Kingdom, Poland, Ukraine, and Bulgaria.

**2010**

Started supplying to Austria, and other markets

**2011**

Successfully entered Italy, Norway, Finland markets; established brand outlets in Mudanjiang and Guangzhou to supply consumers in domestic market with tailored professional garden machinery products

**2013**

Entered Romania, Ireland, and Czech markets.

**2014**

All-round developed e-commerce based on various internet channels and network platforms

**2015**

Opened up markets in Czech, Georgia, New Zealand and Panama.



**Customer Remarks:**

Cooperating with NEWTOP is a pleasant experience. They have strict quality control, and advanced assembly lines, strict inspection before delivery and professional after-sales service team. I have visited their head quarter in Shanghai, and was impressed by their

enthusiasm, sincerity and spirit of striving for perfection. The efficient management and strict process in their factory convinced me that products of NEWTOP are reliable. With strict quality control each part is flawless and assembled quickly and accurately, each machine is

perfectly tested. I have cooperated with NEWTOP for years, their assured quality, in time delivery and great aftersales service make me feel relaxed and comfortable. Shanghai NEWTOP is trustworthy.





**CRAFTOP®**

CRAFTOP Brings You A New Passion For Gardening Tools.



## Values ☺

Achieve a win-win cooperation through integrity and honesty; Gather people with dreams to seek for excellence.

## Working Style ☺

Create unique values for our customers  
Make Newtop a prestigious and first-class enterprise


## Mission ☺

Make garden life more enjoyable by providing more applicable and eco-friendly machines.

## Vision ☺

Create unique values for our customers; Make Newtop a prestigious and first-class enterprise.

## Enterprise Certification

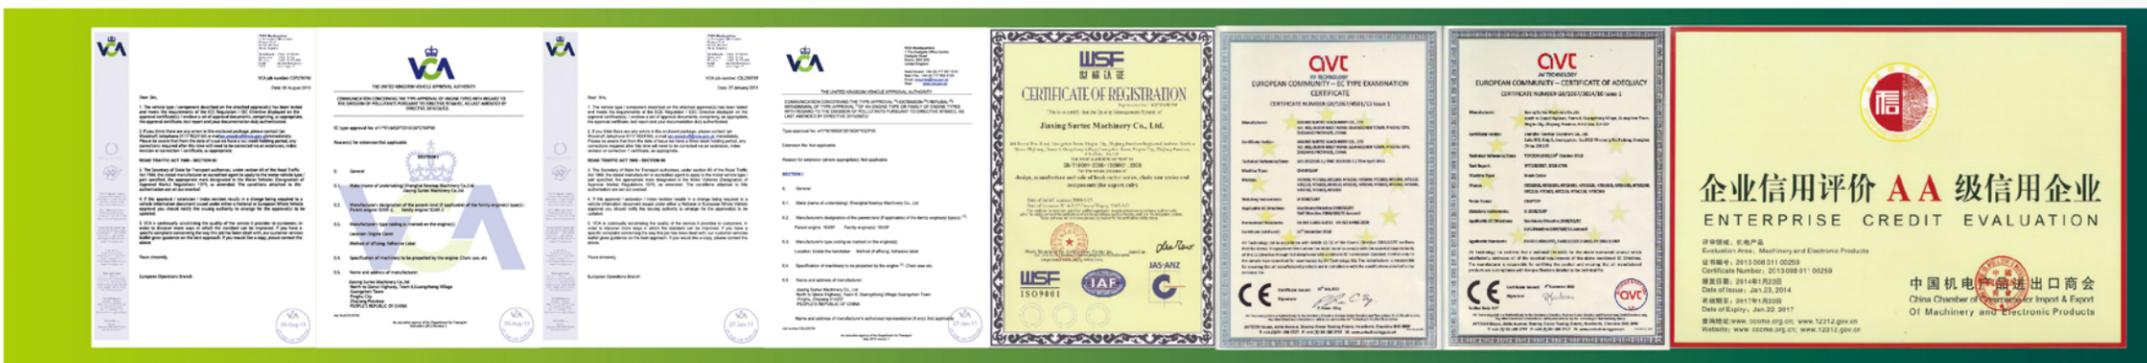

## Easiness, convenience and efficiency

are our constant pursuit in quality.  
Consideration, professionalism and your satisfaction are our persistent principles in offering service.

You might just see our good quality products.  
You might just enjoy our high level service.  
However, you might not yet have discovered our determination.  
You might not yet have known that we put our

heart and soul on every product.  
We chase the excellence of every detail of our products to meet your gardening design demands.  
We make an effort in every link of our

services to make you feel our friendly concern.  
Because, we know what you really need.

# PROFESSIONAL CHAINSAW

## Features And Optional Configuration

- Imported Japanese WALBRO carburetor
- Imported chains of famous brands
- High quality light and durable 18"-36" guide bars available
- Low machine noise thanks to the adoption of latest technology
- Newly designed engine with low fuel consumption and high efficiency
- Sustainable and efficient performance under harsh conditions



### NT9210

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	54mm×40mm
Displacement :	91.6cc
Rated Output power&Relevant Speed :	5.2kw/9500rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	825ml
Engine Oil Tank Capacity :	360ml
Guide Bar Size :	16"-36"
Chain Pitch :	3/8"/.404"
Chain Gauge :	.063"
G.W. / N.W.	9kg/7.3kg



Certificates:  

				
<b>75LPX</b> <b>75VPX</b>	3/8"	.063"(1.6mm)	7/32"(5.5mm)	
<b>68LX</b>	.404"	.063"(1.6mm)	7/32"(5.5mm)	



Double spiked bumpers make it more convenient to fix the machine on trees and enable easy cutting.



The streamline designed top cover prevents wood clips from going into the machine and reduces carburetor blocking. The twist lock allows easy removal of the top cover.



With big power, high efficiency and long life, this chain saw is highly recommended to be applied to harsh environmental conditions.



Our products have passed  
CE safety certification.  
Our company is certified  
with ISO9001 standards.



## NT9200

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	54mm×40mm
Displacement :	91.6cc
Rated Output power&Relevant Speed :	5.2kw/9500rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	825ml
Engine Oil Tank Capacity :	360ml
Guide Bar Size :	16"-36"
Chain Pitch :	3/8"/.404"
Chain Gauge :	.063"
G.W. / N.W.	9kg/7.3kg

Certificates:



<b>75LPX</b> <b>75VPX</b>	3/8"	.063"(1.6mm)	7/32"(5.5mm)
<b>68LX</b>	.404"	.063"(1.6mm)	7/32"(5.5mm)



## CRAFTOP CHAINSAW FOR PROFESSIONALS



As professional loggers, you should have right assessment on the conditions when cutting the tree: the strongest part of the tree crown, any rot occurs on the trunk and the direction of the wind. Everything will be well solved with right equipment. The

CRAFTOP chainsaw is designed to meet the needs of those professionals, integrated and the best performance. Powerful engine with its strength and durability makes it fit for cutting and big trees.



### Features:

1. Light and easy to operate.
2. The most powerful Chinese chainsaw with 5.2kw.
3. Excellent anti-vibration system allows more comfortable operation and flat cutting surface.
4. With optimized scroll scavenging groove cylinder and anti-dust and anti-interference carburetor to lower down 35% of fuel consumption.
5. More eco-friendly and less pollution.
6. With newly designed brake system to provide you higher security.
7. Paper filters and anti-jet structure enable the engine to run more smoothly.
8. Reasonable structure, compatible flywheel and welded fuel tank ease the process of maintenance.



### NT7010

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	54mm×34mm
Displacement :	72.5cc
Rated Output power&Relevant Speed :	3.6kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	750ml
Engine Oil Tank Capacity :	450ml
Guide Bar Size :	18"-24"
Chain Pitch :	3/8"
Chain Gauge :	.063"
G.W. / N.W.	8kg/6.1kg



Certificates:  



**OREGON**



**75LPX  
75VPX**      3/8"      .063"(1.6mm)      7/32"(5.5mm)



### NT6800

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	50mm×34mm
Displacement :	68cc
Rated Output power&Relevant Speed :	3.2kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	750ml
Engine Oil Tank Capacity :	450ml
Guide Bar Size :	16"-24"
Chain Pitch :	3/8"
Chain Gauge :	.063"
G.W. / N.W.	8kg/6.1kg



Certificates:  



**OREGON**



**75LPX  
75VPX**      3/8"      .063"(1.6mm)      7/32"(5.5mm)



## NT6200

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	48mm×34mm
Displacement :	61.5cc
Rated Output power&Relevant Speed :	2.9kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	750ml
Engine Oil Tank Capacity :	450ml
Guide Bar Size :	16"-24"
Chain Pitch :	3/8"
Chain Gauge :	.063"
G.W. / N.W.	8kg/6.1kg

Certificates:



OREGON



75LPX  
75LGX

3/8"



.063"(1.6mm)



7/32"(5.5mm)



## NT6210-ES

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	48mm×34mm
Displacement :	61.5cc
Rated Output power&Relevant Speed :	2.9kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	750ml
Engine Oil Tank Capacity :	450ml
Guide Bar Size :	16"-24"
Chain Pitch :	3/8"
Chain Gauge :	.063"
G.W. / N.W.	8kg/6.1kg

Certificates:



OREGON



75LPX  
75LGX

3/8"



.063"(1.6mm)



7/32"(5.5mm)

Hardened alloy chain,  
lower kick-back ,more  
durable



High density,  
hardened mateial  
and super durability



Efficient and durable  
spark plug.  
High efficiency air  
filter, easy to clean



Fly wheel made of  
strong stainless steel,  
easy to start and more  
effective for cooling



Easy start system





Craftop powerful chainsaw, the good choice of professionals and homeowners. No matter you use it in the field, on the farm, in the orchard or the garden, the super power, ease of operation and easy maintenance make Crafter chainsaw fit for the work perfectly.



**All-round Chainsaw**



### NT5800

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	45.2mm×34mm
Displacement :	54.5cc
Rated Output power&Relevant Speed :	2.2kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	550ml
Engine Oil Tank Capacity :	260ml
Guide Bar Size :	16"-24"
Chain Pitch :	3/8"/.325"
Chain Gauge :	.050"/.058"
G.W. / N.W.	8kg/5.3kg

Certificates:



### NT5800-ES

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	45.2mm×34mm
Displacement :	54.5cc
Rated Output power&Relevant Speed :	2.2kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	550ml
Engine Oil Tank Capacity :	260ml
Guide Bar Size :	16"-24"
Chain Pitch :	3/8"/.325"
Chain Gauge :	.050"/.058"
G.W. / N.W.	8kg/5.3kg

Certificates:



OREGON.			
20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)



# CRAFTOP CHAINSAW



## NT5200

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	45mm×31mm
Displacement :	49.3cc
Rated Output power&Relevant Speed :	2.0kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	550ml
Engine Oil Tank Capacity :	260ml
Guide Bar Size :	16"-22"
Chain Pitch :	3/8"/.325"
Chain Gauge :	.050"/.058"
G.W. / N.W.	8kg/5.3kg



Certificates: **Eu II**



20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)	
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)	



## NT5200-ES

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	45mm×31mm
Displacement :	49.3cc
Rated Output power&Relevant Speed :	2.0kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	550ml
Engine Oil Tank Capacity :	260ml
Guide Bar Size :	16"-22"
Chain Pitch :	3/8"/.325"
Chain Gauge :	.050"/.058"
G.W. / N.W.	8kg/5.3kg



Certificates: **Eu II**

20LPX 20VPX	.325"	.050"(1.27mm) .058"(1.47mm)	3/16"(4.8mm)	
73LPX 73VPX	3/8"	.058"(1.47mm)	5/32"(4.0mm)	



Web: [www.newtopen.com](http://www.newtopen.com)



It is a general-purpose chain saw with super power-to-weight ratio and professional performance. Easy starter and primer bulb ensure quick and easy start. The chain saw is ideal for felling trees and cutting both small and big wood.



### NT4500

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	43mm×31mm
Displacement :	45cc
Rated Output power&Relevant Speed :	1.7kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	550ml
Engine Oil Tank Capacity :	260ml
Guide Bar Size :	16"-20"
Chain Pitch :	3/8".325"
Chain Gauge :	.050"/.058"
G.W. / N.W.	7.9kg/5.3kg

Certificates:



	OREGON			
20LPX 20VPX	.325"	.050*(1.27mm) .058*(1.47mm)	3/16*(4.8mm)	
73LPX 73VPX	3/8"	.058*(1.47mm)	5/32*(4.0mm)	



### NT4500-ES

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	43mm×31mm
Displacement :	45cc
Rated Output power&Relevant Speed :	1.7kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	550ml
Engine Oil Tank Capacity :	260ml
Guide Bar Size :	16"-20"
Chain Pitch :	3/8".325"
Chain Gauge :	.050"/.058"
G.W. / N.W.	7.9kg/5.3kg

Certificates:



	OREGON			
20LPX 20VPX	.325"	.050*(1.27mm) .058*(1.47mm)	3/16*(4.8mm)	
73LPX 73VPX	3/8"	.058*(1.47mm)	5/32*(4.0mm)	

Web: [www.newtopen.com](http://www.newtopen.com)



### NT4200 features:

Low weight, super power-to-weight ratio and excellent damping system designed for trees with diameter under 30cm.

### NT3700 Features:

A portable and easily-operated chainsaw with low vibration which is designed for small trees and landscape trimming.



## NT4200

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	40mm×32mm
Displacement :	40.2cc
Rated Output power&Relevant Speed :	1.7kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	410ml
Engine Oil Tank Capacity :	200ml
Guide Bar Size :	14"-18"
Chain Pitch :	3/8"/.325"
Chain Gauge :	.050"
G.W. / N.W.	5.7kg/4.4kg



Certificates:



72LPX	3/8"	.050*(1.27mm)	7/32*(5.5mm)
20LPX	.325"	.050*(1.27mm)	3/16*(4.8mm)



## NT3700

### Product Specification


Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	38mm×32mm
Displacement :	36.3cc
Rated Output power&Relevant Speed :	1.5kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	410ml
Engine Oil Tank Capacity :	200ml
Guide Bar Size :	14"-18"
Chain Pitch :	3/8"/.325"
Chain Gauge :	.050"
G.W. / N.W.	5.7kg/4.4kg



Certificates:



72LPX	3/8"	.050*(1.27mm)	7/32*(5.5mm)
20LPX	.325"	.050*(1.27mm)	3/16*(4.8mm)

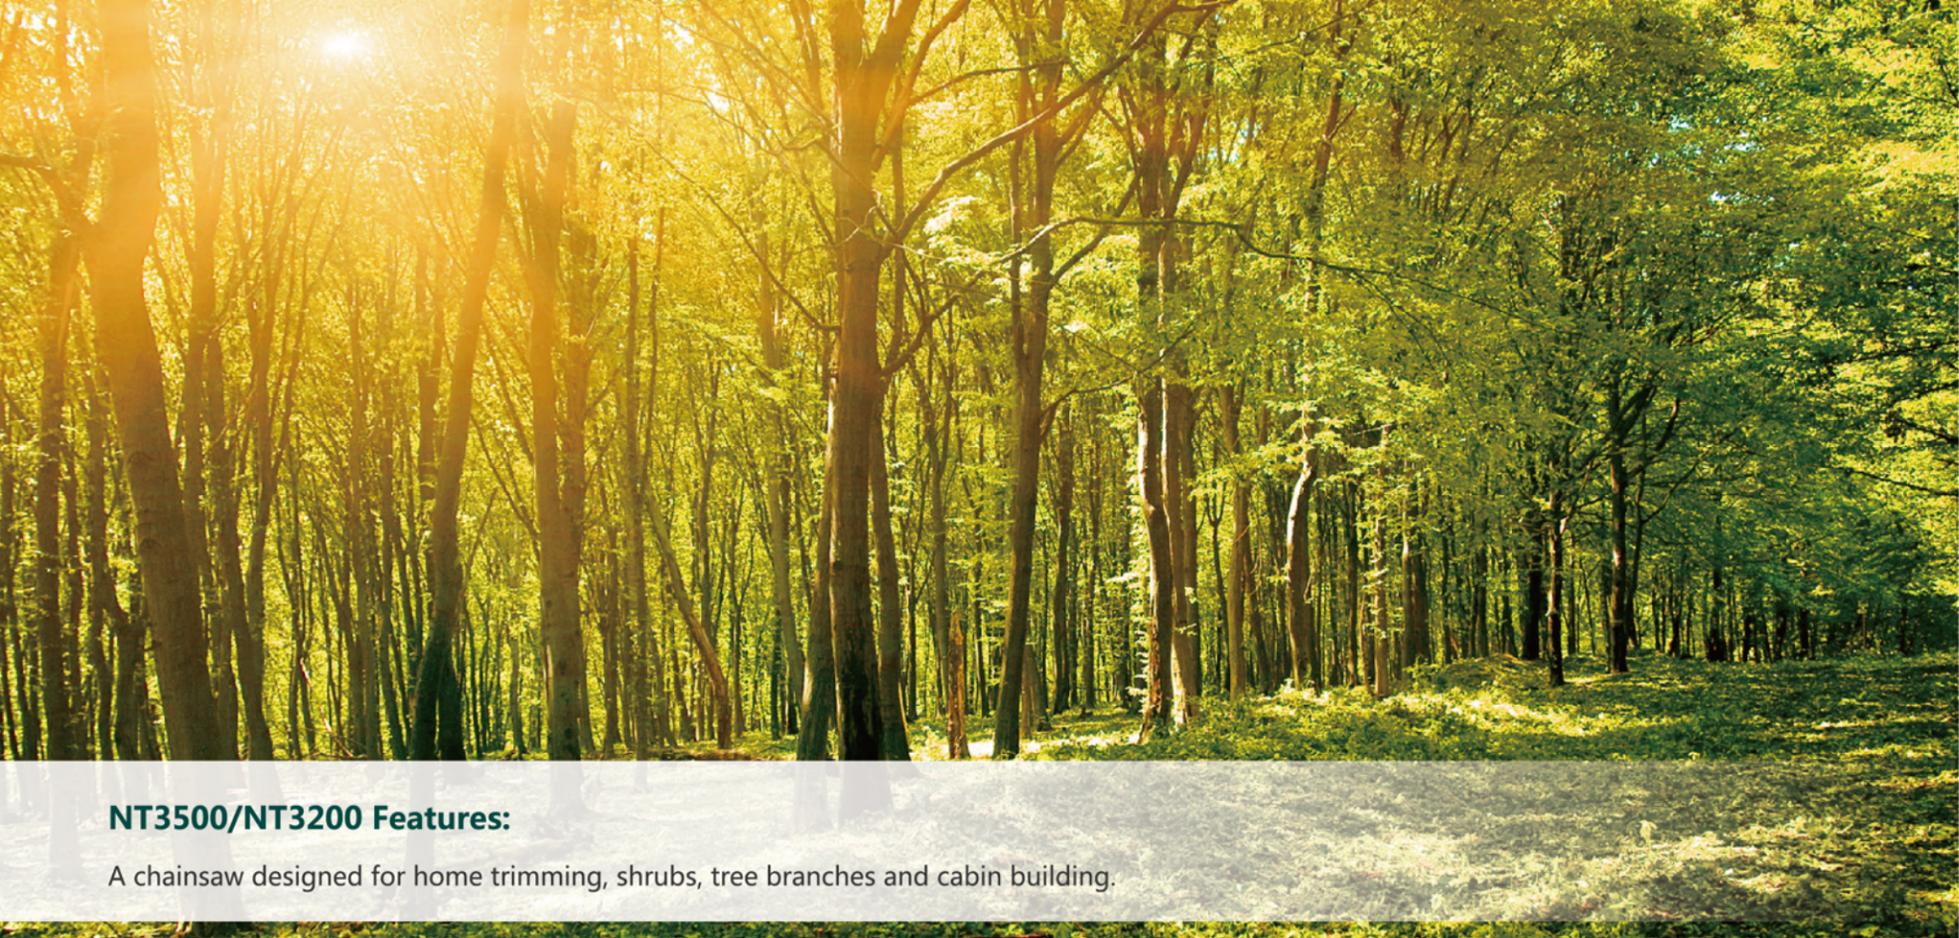

### NT3500/NT3200 Features:

A chainsaw designed for home trimming, shrubs, tree branches and cabin building.



### NT3500

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	40mm×28mm
Displacement :	35cc
Rated Output power&Relevant Speed :	1.4kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	250ml
Engine Oil Tank Capacity :	145ml
Guide Bar Size :	14"/16"
Chain Pitch :	3/8"
Chain Gauge :	.050"
G.W. / N.W.	5.9kg/3.9kg



Certificates: CE Eu II



**OREGON**

**91PX 91VXL**    3/8"    .050"(1.27mm)    5/32"(4.0mm)



### NT3200

#### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	38mm×28mm
Displacement :	31.8cc
Rated Output power&Relevant Speed :	1.3kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	250ml
Engine Oil Tank Capacity :	145ml
Guide Bar Size :	14"/16"
Chain Pitch :	3/8"
Chain Gauge :	.050"
G.W. / N.W.	5.9kg/3.9kg



Certificates: CE Eu II



**OREGON**

**91PX 91VXL**    3/8"    .050"(1.27mm)    5/32"(4.0mm)



## NT2500

### Product Specification

Power Type :	Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	34mm×28mm
Displacement :	25.4cc
Rated Output power&Relevant Speed :	0.9kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	230ml
Engine Oil Tank Capacity :	160ml
Guide Bar Size :	10"/12"/14"
Chain Pitch :	3/8"
Chain Gauge :	.050"
G.W. / N.W.	5kg/4kg

Certificates:



## NT10500

### Product Specification

Power Type :	Single Cylinder , Two-stroke , Air-cooling
Cylinder Diameter ×Stroke :	58mm×40mm
Displacement :	105.7cc
Rated Output power&Relevant Speed :	4.8kw/8000rpm
Fuel Mixture Ratio :	25:1(Gasoline25 : Two-cycle Oil 1)
Fuel Tank Capacity :	1200ml
Engine Oil Tank Capacity :	530ml
Guide Bar Size :	25"-42"
Chain Pitch :	.404"
Chain Gauge :	.063"
G.W. / N.W.	12.5kg/10.5kg



Mount guide bars as long as 42"



Most powerful Chinese Chain Saw, a good helper for loggers in tough conditions. Even with 36" guide bar, wood cutting and ripping can be done easily. It's a super chainsaw with the best power-to-weight ratio in the industry.



Magnesium Crankcase with smaller weight, better shock absorption and cooling performance.



Handle made of new rubber material, good in shock absorption and comfortable for use during work.



Magnesium cover, light and durable.



<b>OREGON.</b>			
68LX	.404"	.063"(1.6mm)	7/32"(5.5mm)

## Brush Cutters & Grass Trimmers

The dual spring easy starting structure enables the machine to get started easily. Shock damping system starts automatically once the engine is started. This also increases the stability of the work pole and reduces shaft friction. Independent carburetor design coupled with air filter system effectively prevents oil and gas reverse jet when the engine runs at a high speed. These designs make the engine more durable.





### NTD430

#### Product Specification

Match Engine :	1E40F-5B
Displacement :	42.7cc
Standard Power :	1.3kw/7500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:TWO-cycle Oil 1)
Capacity :	1000ml
Diameter Of Al. Pipe :	26mm
G.W. / N.W.	10.4kg/8.3kg

Certificates:



### NTD520

#### Product Specification

Match Engine :	1E44FA
Displacement :	51.7cc
Standard Power :	1.6kw/7500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:TWO-cycle Oil 1)
Capacity :	1000ml
Diameter Of Al. Pipe :	26mm
G.W. / N.W.	10.4kg/8.3kg

Certificates:

#### Product Testing

The machines and components are tested in strict accordance with the requirements of ISO9001 quality certification system. The testing equipments include engine power testing system, engine durability testing system, emission analysis system, micro-hardness tester, roughness tester, ignition angle tester, air gauge, brake testing board, starter endurance testing platform and a variety of specialized testing equipments.



#### Product Design

- The machines are equipped with excellent cooling system to ensure the strong power of the engine.
- The automatic throttle design and the effective air-cleaning system enable the engine to work with longer life.
- The unique dual-scavenging tank design brings better performance of the engine.
- The carefully crafted gear case has the merits of low noise, low temperature and longer life.
- The uniquely designed clutch bell and solded steel axle can work with extremely longer life.
- The design of the engine with strong power and low fuel consumption enables the machine to work more effectively with longer life.
- The nice design in appearance and the effective anti-vibration system make the machine more user-friendly.
- The easy-starting system saves time and strength to start the machine.

#### Product Processing

The use of imported high-precision CNC equipments to process the parts effectively ensures the high accuracy of the products.



#### Product Material

The use of super hard alloy steel material on the engine parts brings the super fine quality of the machine. The use of low-temperature-resistant material for plastic parts enables the machine to work normally even in harsh conditions.

#### Product Certifications


Our products have passed GS, CE safety certification, EURO II emission certification, and are approved by the state-authorized testing organizations.



#### Common Features

- A.** The easy start device design start the brush cutter smoothly.
- B.** New double cotton of air filter provides fresh air to the engine.
- C.** New automatic choke design, simplifies the start-up procedure.
- D.** Fuel box plug is built-in in the air filter to avoid the plug blocking during brush cutter works in harsh environments.
- E.** Strong wearproof cemented carbide drive shaft provides smooth operation and less vibration.
- F.** Butterfly carburetor of the brush cutter improves the power.

- Low Emission
- Easy Starting
- Strong Power
- Save Fuel 20%-30%

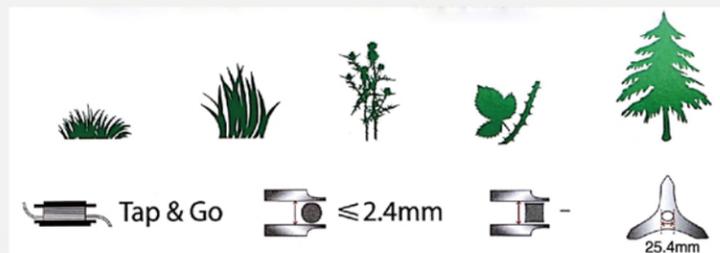

Use Lawn, Weeds, Bush, Forest, Harvesting





- With Japan Walbro carburetor, stable power output
- Super wear-resistant carbide hard shaft provides stable transmission
- Specially designed gear box enables smooth operation
- Powerful engine ensures efficient operation
- 100% new nylon material extends the life of machine
- Excellent easy starting performance allows less effort



**NTC420**


**NTC520**

**Product Specification**

Match Engine :	1E40F-5A	1E44FA
Displacement :	42.7cc	51.7cc
Standard Power :	1.3kw/7500rpm	1.6kw/7500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:TWO-cycle Oil 1)	25:1(Gasoline25:TWO-cycle Oil 1)
Capacity :	900ml	900ml
Diameter Of Al. Pipe :	26mm	26mm
G.W. / N.W.	10.4kg/8.3kg	10.4kg/8.3kg

Certificates: **Eu II**

Certificates: **Eu II**

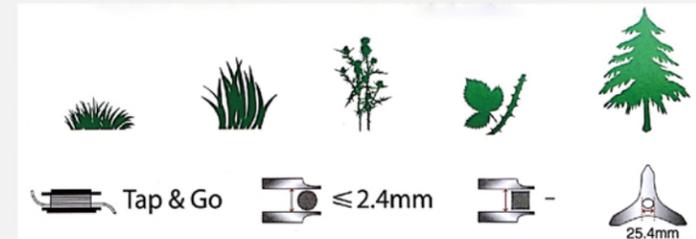

Use Lawn, Weeds, Bush, Forest, Harvesting

Web: [www.newtopen.com](http://www.newtopen.com)



### NTC430QL

#### Product Specification

Match Engine : 1E40F-5A  
 Displacement : 42.7cc  
 Standard Power : 1.3kw/6500rpm  
 Mixed Fuel Ratio : 25:1(Gasoline25:TWO-cycle Oil 1)  
 Capacity : 900ml  
 Diameter Of Al. Pipe : 32mm  
 G.W. / N.W. : 10.1kg/8.3kg

Certificates:



### NTB330B

### NTB430B

### NTB520B

#### Product Specification

Match Engine :	1E36F-2B	1E40F-5B	1E44FA
Displacement :	32.6cc	42.7cc	51.7cc
Standard Power :	0.9kw/6500rpm	1.3kw/6500rpm	1.6kw/7500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:TWO-cycle Oil 1)	25:1(Gasoline25:TWO-cycle Oil 1)	25:1(Gasoline25:TWO-cycle Oil 1)
Capacity :	750ml	900ml	900ml
Diameter Of Al. Pipe :	26mm	26mm	26mm
G.W. / N.W.	9.8kg/7.6kg	10kg/7.6kg	10kg/7.6kg

Certificates:



### NTB520QL


#### Product Specification

Match Engine : 1E44FB  
 Displacement : 51.7cc  
 Standard Power : 1.6kw/7500rpm  
 Mixed Fuel Ratio : 25:1(Gasoline25:Two-cycle Oil 1)  
 Capacity : 900ml  
 Diameter Of Al. Pipe : 32mm  
 N.W/G.W : 10.9kg/9kg


Certificates:



Any weeds, shrubs and trees cannot resist the power of CRAFTOP bush cutters. That's why this bush cutter is ideal for professional use. It can effectively cut off weeds, shrubs and trees along roads & rivers and on wasteland. In other difficult conditions, such as land reclamation, it is also durable and reliable. Advantages: particularly strong power, comfortable operation and perfect cutting performance.

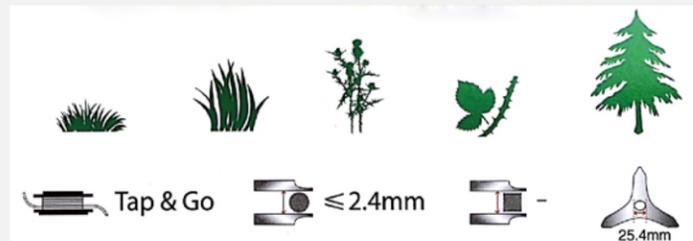

Use   
 For mowing large areas of long grass  
 For clearing weeds and tree cultivation

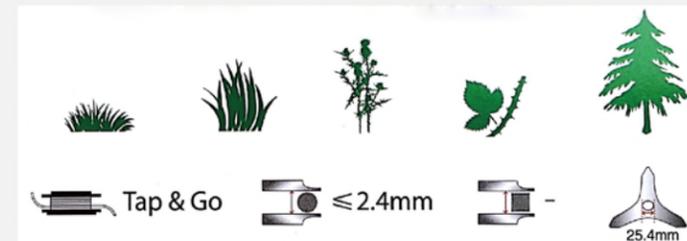

Use   
 For mowing large areas of long grass  
 For clearing weeds and tree cultivation



## NTCG260

### Product Specification

Match Engine :	1E34F
Displacement :	26cc
Standard Power :	0.7kw/6500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:Two-cycle Oil 1)
Capacity :	650ml
Diameter Of Al. Pipe :	26mm
G.W. / N.W.	8kg/6kg

Certificates :   **Eu II**



Low fuel consumption, stable and powerful. Small weight, easy operation and excellent performance make it perfect for use in gardens and wide areas with grass less than 1cm in diameter.



**Features:**

- Elaborately matched high quality carburetor enables stable power output
- Super wear-resistant carbide hard shaft provides stable transmission
- Specially designed gearbox enables smooth operation
- Powerful engine ensures efficient operation
- 100% new nylon material extends the life of machine
- Easy starting device allows less effort in starting
- Backpack brush cutters are easily used in hills, terraced etc.



	NTCG330	NTCG430	NTCG520
<b>Product Specification</b>			
Match Engine :	1E36F-2A	1E40F-5A	1E44FA
Displacement :	32.6cc	42.7cc	51.7cc
Standard Power :	0.9kw/6500rpm	1.3kw/6500rpm	1.6kw/6500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:TWO-cycle Oil 1)	25:1(Gasoline25:TWO-cycle Oil 1)	25:1(Gasoline25:TWO-cycle Oil 1)
Capacity :	850ml	1.3L	1.3L
Diameter Of Al. Pipe :	26mm	26mm	26mm
G.W.	9.8kg/7.6kg	10kg/7.8kg	10kg/7.8kg
Certificates:	<b>Eu II</b>	<b>Eu II</b>	<b>Eu II</b>

With strong power, small weight, easy starting and comfortable operation, CRAFTOP machinery has been proved to have more stable and reliable performance especially in harsh environments.



Use Hills, Terrace and Orchard




Luxury

Simple



	NTC430BG	NTC520BG
<b>Product Specification</b>		
Match Engine :	1E40F-5A	1E44FA
Displacement :	42.7cc	51.7cc
Standard Power :	1.3kw/7500rpm	1.6kw/7500rpm
Mixed Fuel Ratio :	25:1(Gasoline25:TWO-cycle Oil 1)	25:1(Gasoline25:TWO-cycle Oil 1)
Capacity :	900ml	900ml
Diameter Of Al. Pipe :	26mm	26mm
G.W. / N.W.	10.2kg/8.6kg	10.3kg/8.6kg
Certificates:	<b>Eu II</b>	<b>Eu II</b>

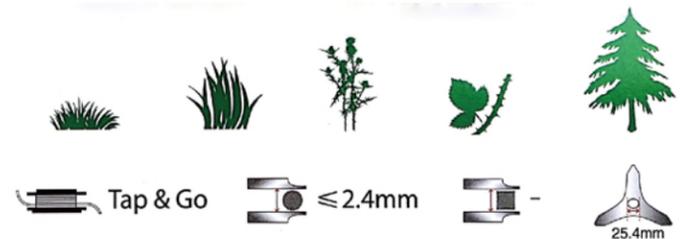

Use For mowing large areas of long grass For clearing weeds and tree cultivation



Web: www.newtopen.com



Effective & Stable  
Your Best Choice.




**NTS140CG**

**Product Specification**

Match Engine :	GX35
Displacement :	35.8cc
Standard Power :	0.75kw/1hp
Capacity :	500ml
Diameter Of Al. Pipe :	26mm or 28mm
G.W. / N.W.	8.8kg/7kg

Certificates:

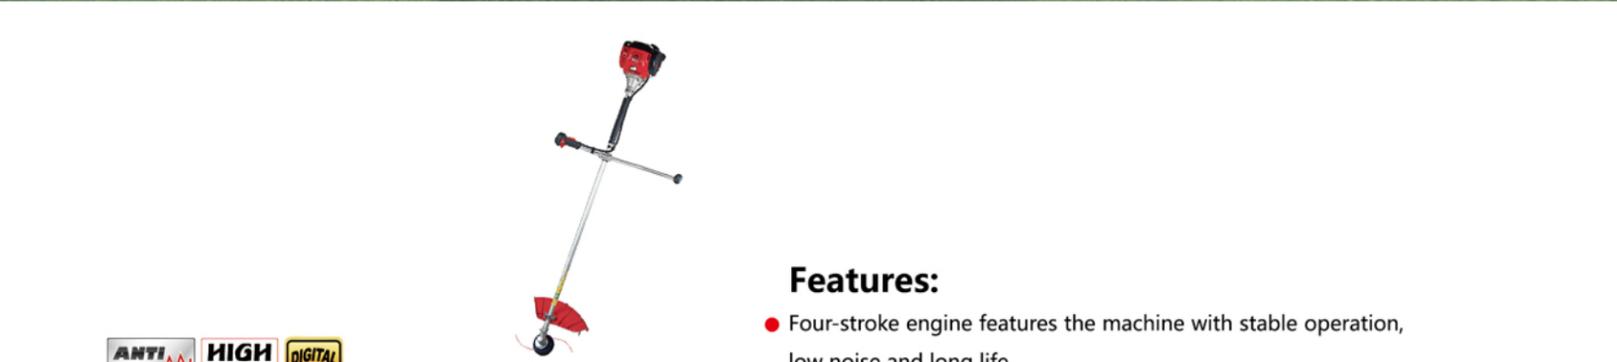

**NTS139CG**

**Product Specification**


Match Engine :	139
Displacement :	31.3cc
Standard Power :	0.7kw/6500rpm
Capacity :	500ml
Diameter Of Al. Pipe :	26mm
G.W. / N.W.	11kg/9.2kg

Certificates:




**Features:**

- Four-stroke engine features the machine with stable operation, low noise and long life.
- Super wear-resistant carbide hard shaft provides stable transmission.
- Specially designed gear box enables smooth operation.
- Powerful engine ensures efficient operation.
- 100% new nylon material extends the life of machine.
- Excellent starting performance allows less effort.

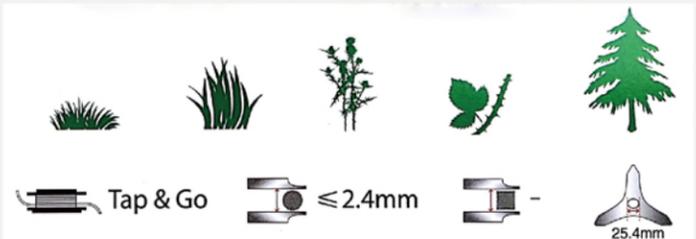

Use Weeds, Bush (especially on Hills and Terrace)

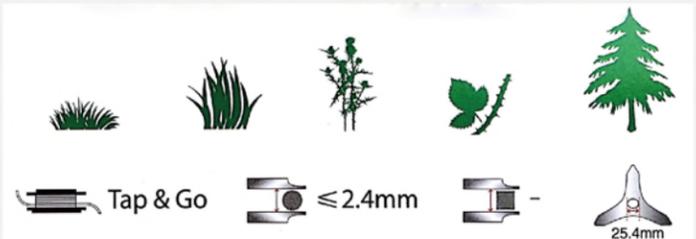

Use Weeds, Bush (especially on Hills and Terrace)

# Pole Saw



## NTPS260

### Product Specification

Match Engine :	1E34F
Displacement :	26cc
Standard Power :	0.7kw/6500rpm
Capacity :	500ml
Diameter Of Al. Pipe :	26mm
G.W. / N.W.	8kg/6kg

Certificates : GS CE Eu II

Low fuel consumption and stable. Tube of different length available. Small weight and easy for operation. Widely used for cutting trees in gardens and along the streets.



## Product Design

- Long service life expected through Nikasil cylinder coating.
- High engine speed and improved fan performance
- Best air performance – high air delivery velocity at the spray nozzle and over a long range.
- More economical operation in the long term through lower fuel consumption
- Low emissions
- Improved fuel utilization and lower exhaust gas emissions through advanced know-how in cylinder fuel transfer technology. Minimum scavenging losses with this new two-stroke engine

- Optimized combustion
- Quiet engine and even fewer vibrations through improved through exhaust gas reduction
- Constant performance – constant engine performance, even in extreme heat





## NTS423

### Product Specification

Engine:	2-stroke engine
Rated out put power:	3.9kw
Displacement:	72.3cc
Container capacity:	12L
Max air flow rate:	1300 M3/H
Horizontal reach:	15m
G.W / N.W :	12kg / 11kg
Meas:	690*450*330mm
20°FCL:	285pcs
Certification:	CE



## Sprayer

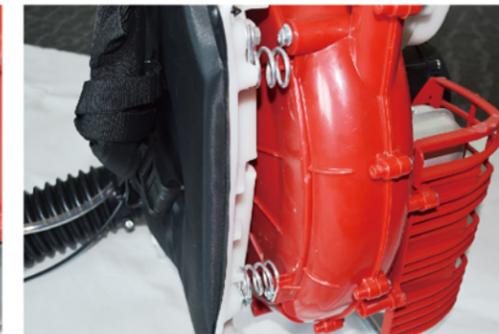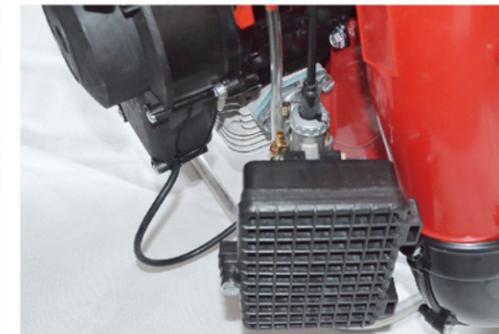

# Sprayer



## NTS420

### Product Specification

Engine:	2-stroke engine
Rated out put power:	2.6kw
Displacement:	56.5cc
Container capacity:	14L
Max air flow rate:	1300 M3/H
Horizontal reach:	15m
G.W / N.W :	12kg / 10.6kg
Meas:	500*440*680mm
20°FCL:	285pcs
Certification:	CE



# Sprayer



## NTS428

### Product Specification

Engine:	2-stroke engine
Rated out put power:	3.6kw
Displacement:	77cc
Container capacity:	16L
Max air flow rate:	1300 M3/H
Horizontal reach:	20m
G.W / N.W :	13kg / 11.5kg
Meas:	740*460*375mm
20°FCL:	220pcs
Certification:	CE



# Earth Auger



## NTA330A-08A

### Product Specification

Match Engine :	1E36F-2A
Displacement :	32.6CC
Standard Power :	0.9kw/6500rpm
Mixed Fuel Rate :	25:1
Capacity :	1.3L
Drive mode :	Gear dirve
Drive ration :	30:1
Drill :	8"
Module Of Gear :	1.85



Optional drill bits:5"/6"

All models can be matched with different engines, arm frames and drill bits.



## NTA430B-10B

### Product Specification

Match Engine :	1E40F-5
Displacement :	42.7CC
Standard Power :	1.4kw/6500rpm
Mixed Fuel Rate :	25:1
Capacity :	1.3L
Drive mode :	Gear dirve
Drive ration :	30:1
Drill :	10"
Module Of Gear :	1.85



Optional drill bits:5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.



## NTA430C-10C

### Product Specification

Match Engine :	1E40F-5
Displacement :	42.7CC
Standard Power :	1.4kw/6500rpm
Mixed Fuel Rate :	25:1
Capacity :	1.3L
Drive mode :	Gear dirve
Drive ration :	25:1
Drill :	10"
Module Of Gear :	1.75



Optional drill bits:5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.



## NTA430D-10C

### Product Specification

Match Engine :	1E40F-5
Displacement :	42.7CC
Standard Power :	1.4kw/6500rpm
Mixed Fuel Rate :	25:1
Capacity :	1.3L
Drive mode :	Gear dirve
Drive ration :	25:1
Drill :	10"
Module Of Gear :	1.75



Optional drill bits:5"/6"/8"

All models can be matched with different engines, arm frames and drill bits.



**NTA520D-12D**

**Product Specification**

Match Engine :	1E44F
Displacement :	51.7CC
Standard Power :	1.6kw/6500rpm
Mixed Fuel Rate :	25:1
Capacity :	1.3L
Drive mode :	Gear dirve
Drive ration :	34:1
Drill :	12"
Module Of Gear :	2.5



Optional drill bits:8"/10"

All models can be matched with different engines, arm frames and drill bits.




# Tea Picking Machine

**NTH260**

**Product Specification**

Match Engine :	1E34F
Displacement :	25.4cc
Standard Power :	0.81kw/8500rpm
length of blade :	650mm
Engine idling speed :	2800-3200r/min
Power Type :	Air-cooling,Single Cylinder
Carburetor :	Diaphragm



# MULTI-FUNCTION TOOLS



- A** Pole Saw
- B** Hedge Trimmer
- C** Grass Trimmer
- D** Sweeper
- E** Tiller
- F** Edger
- G** Blower

# ACCESSORIES




## Brush Cutter Handle Options



Split bike handle A



Complete bike handle A

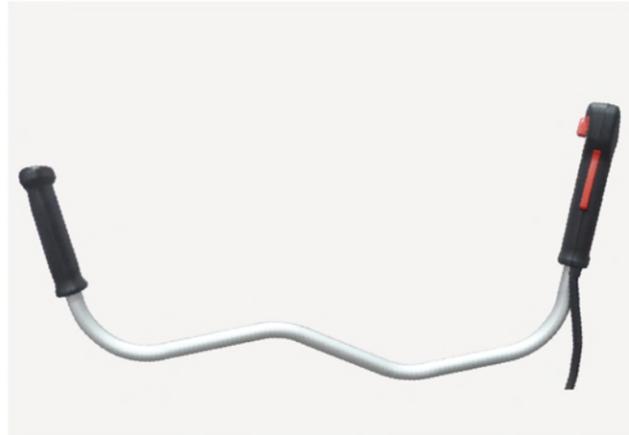

W Handle



Split bike handle B



Complete bike handle B



D-Handle A



D-Handle B



D-Handle C



P-Handle

## Blade Options



2-Teeth Blade



3-Teeth Blade



3-Teeth Blade



4-Teeth Blade



Circular Saw Blade



8-Teeth Blade



40-Teeth Blade



80-Teeth Blade



40-T Diamond Blade A



40-T Diamond Blade B

## Trimmer Head Options



Nylon self-threading trimmer head




Nylon trimmer head old model



Nylon trimmer head new model



Nylon trimmer head



Iron trimmer head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Nylon Trimmer Head



Aluminum Trimmer Head

## Shoulder Belt Options

